


Drain plug  
Push-operated  
drain plug

Intake port

Slit type  
overflow

AIR-JET(8)  
Two mode

Corrugated  
surface

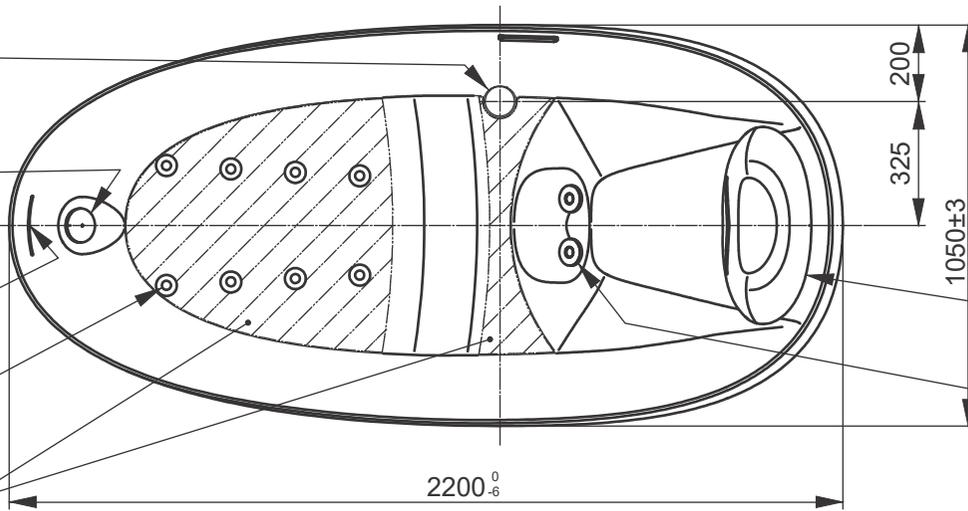



Head rest  
Motion space: 170 mm

HYDRO HANDS(2)  
One mode  
(Circulation)

Product specification	
Rated voltage	220 ~240 VAC
Rated frequency	50 Hz
Rated current	3.5 A
Rated power consumption	700 W
Standbay power consumption	2.8 W
Safety device	<ul style="list-style-type: none"> <li>•Continuous operation preventing device</li> <li>•Overcurrent protection device</li> <li>•Overheating protection device (thermal protection)</li> </ul>

CONTROLLER  
Capacitive touch panel

NECK BATH  
(Circulation)

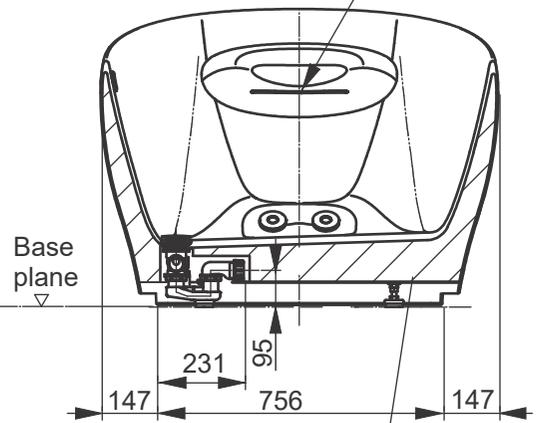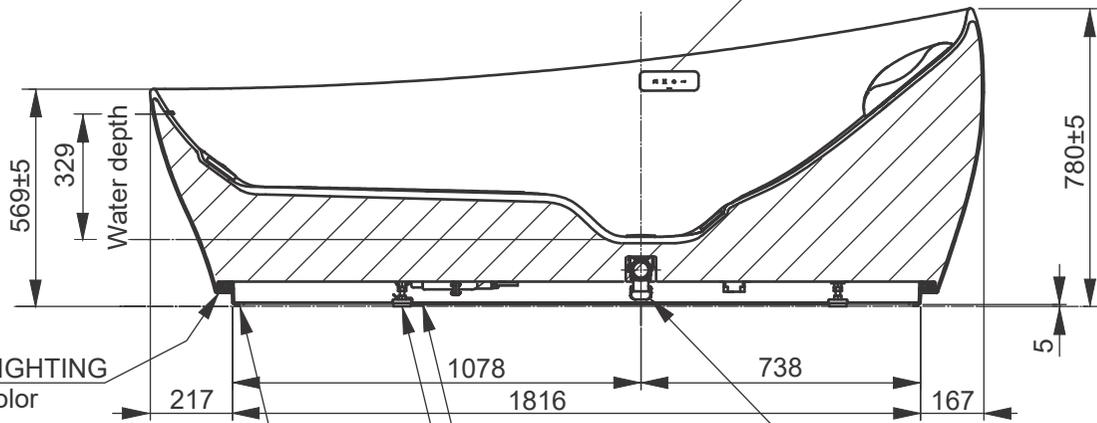

LED LIGHTING  
One color

Polyethylene foam sheet  
Quantity: L1000x5  
(Included parts)

Bathtub fixture  
(Included parts)

Trap  
Inside diameter 40mm  
(Included parts)




Leg(4)  
Motion space: -2mm / +10mm

Power supply unit

Designation		<b>BATHTUB</b>	
		Flotation tub, freestanding	
		PJYD2200PWEE#GW	
Altered		Scale	1:20
		Signed	T.G.
		Date	09/07/2018

**TOTO**

This drawing including the respective data may neither be duplicated nor modified nor altered without the consent of TOTO Europe GmbH. The usage of the data/technical drawings takes place at user's own risk and under exclusion of any liability of TOTO Europe GmbH and/or of the companies of the TOTO-Group. The indicated dimensions are not binding; products are subject to change. Measurements shown may be subject to small variations or are indicative.

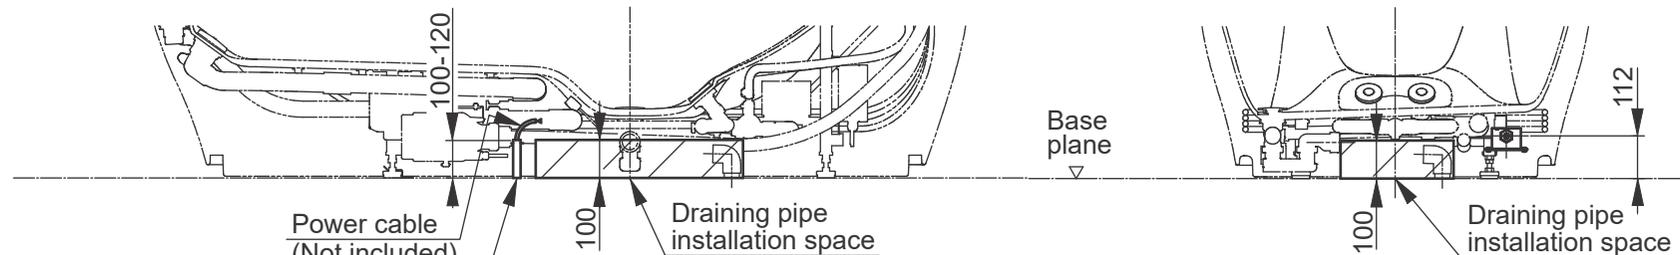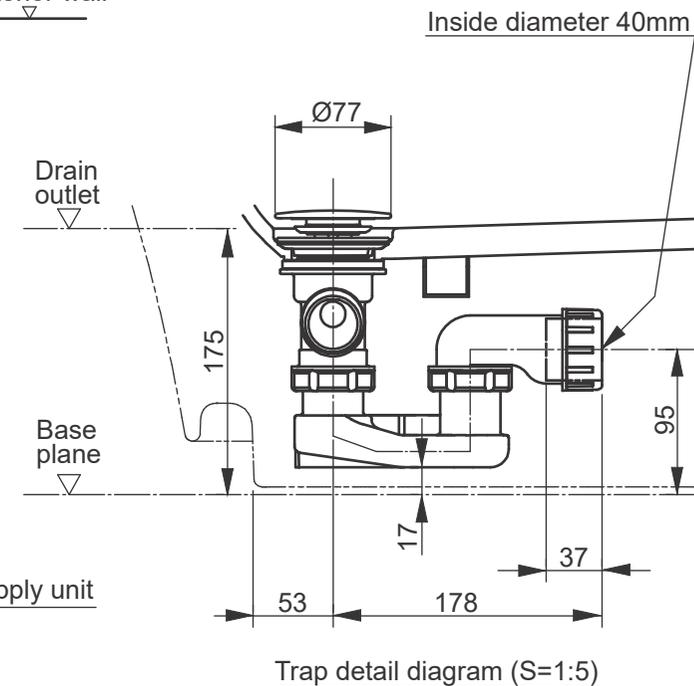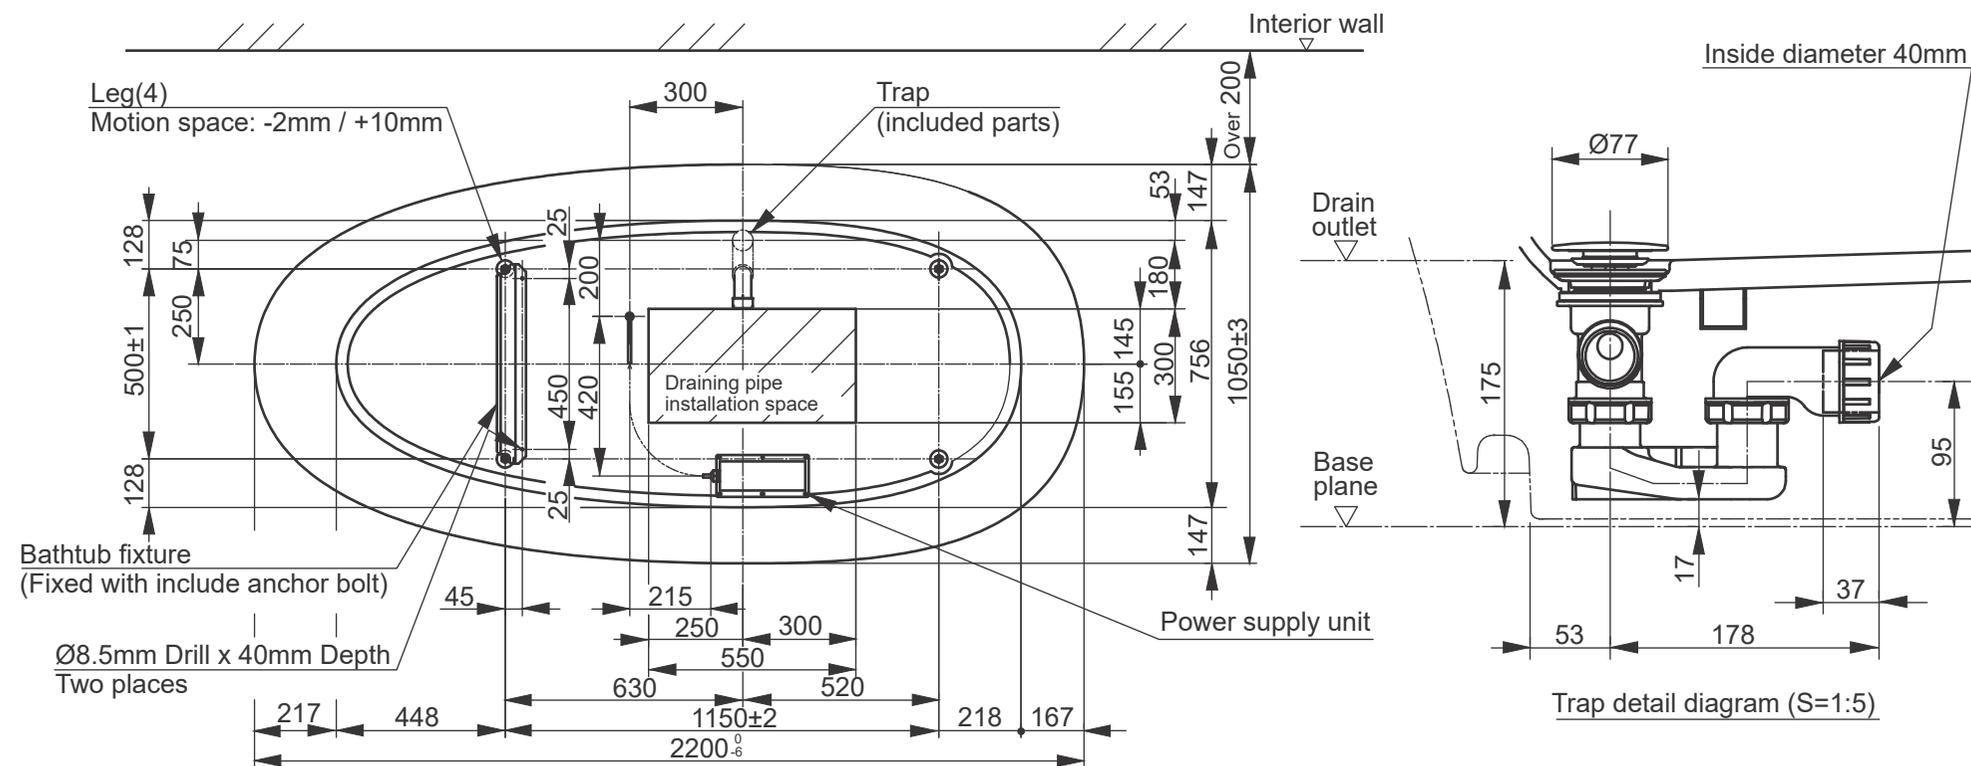

Pipe for cable  
Inside diameter of more than 20mm  
(Not included)

Designation		<b>BATHTUB</b>	
		Flotation tub, freestanding	
		PJYD2200PWEE#GW	
Altered		Scale	1:20
		Signed	T.G.
		Date	09/07/2018

**TOTO**

This drawing including the respective data may neither be duplicated nor modified nor altered without the consent of TOTO Europe GmbH. The usage of the data/technical drawings takes place at user's own risk and under exclusion of any liability of TOTO Europe GmbH and/or of the companies of the TOTO-Group. The indicated dimensions are not binding; products are subject to change. Measurements shown may be subject to small variations or are indicative.

- IMPORTANT**
- Connect the bathtub to drainage.
  - When you embed the power cable on the installation surface, use a pipe with a inside diameter of more than 20 mm.